

**FEATURES:**

1. Material: Tin Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor only.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only, tolerance is +/- .06".


# LN Series:L40N-141

Sales & Customer Service: 800.321.5847  
 Technical Support: 888.500.4598  
 www.nsiindustries.com

<b>PROGRAM:</b>	SOLIDWORKS
<b>VERSION:</b>	2019
<b>SALES REV:</b>	A
<b>SIZE:</b>	B (11x17)



SCALE 2:1

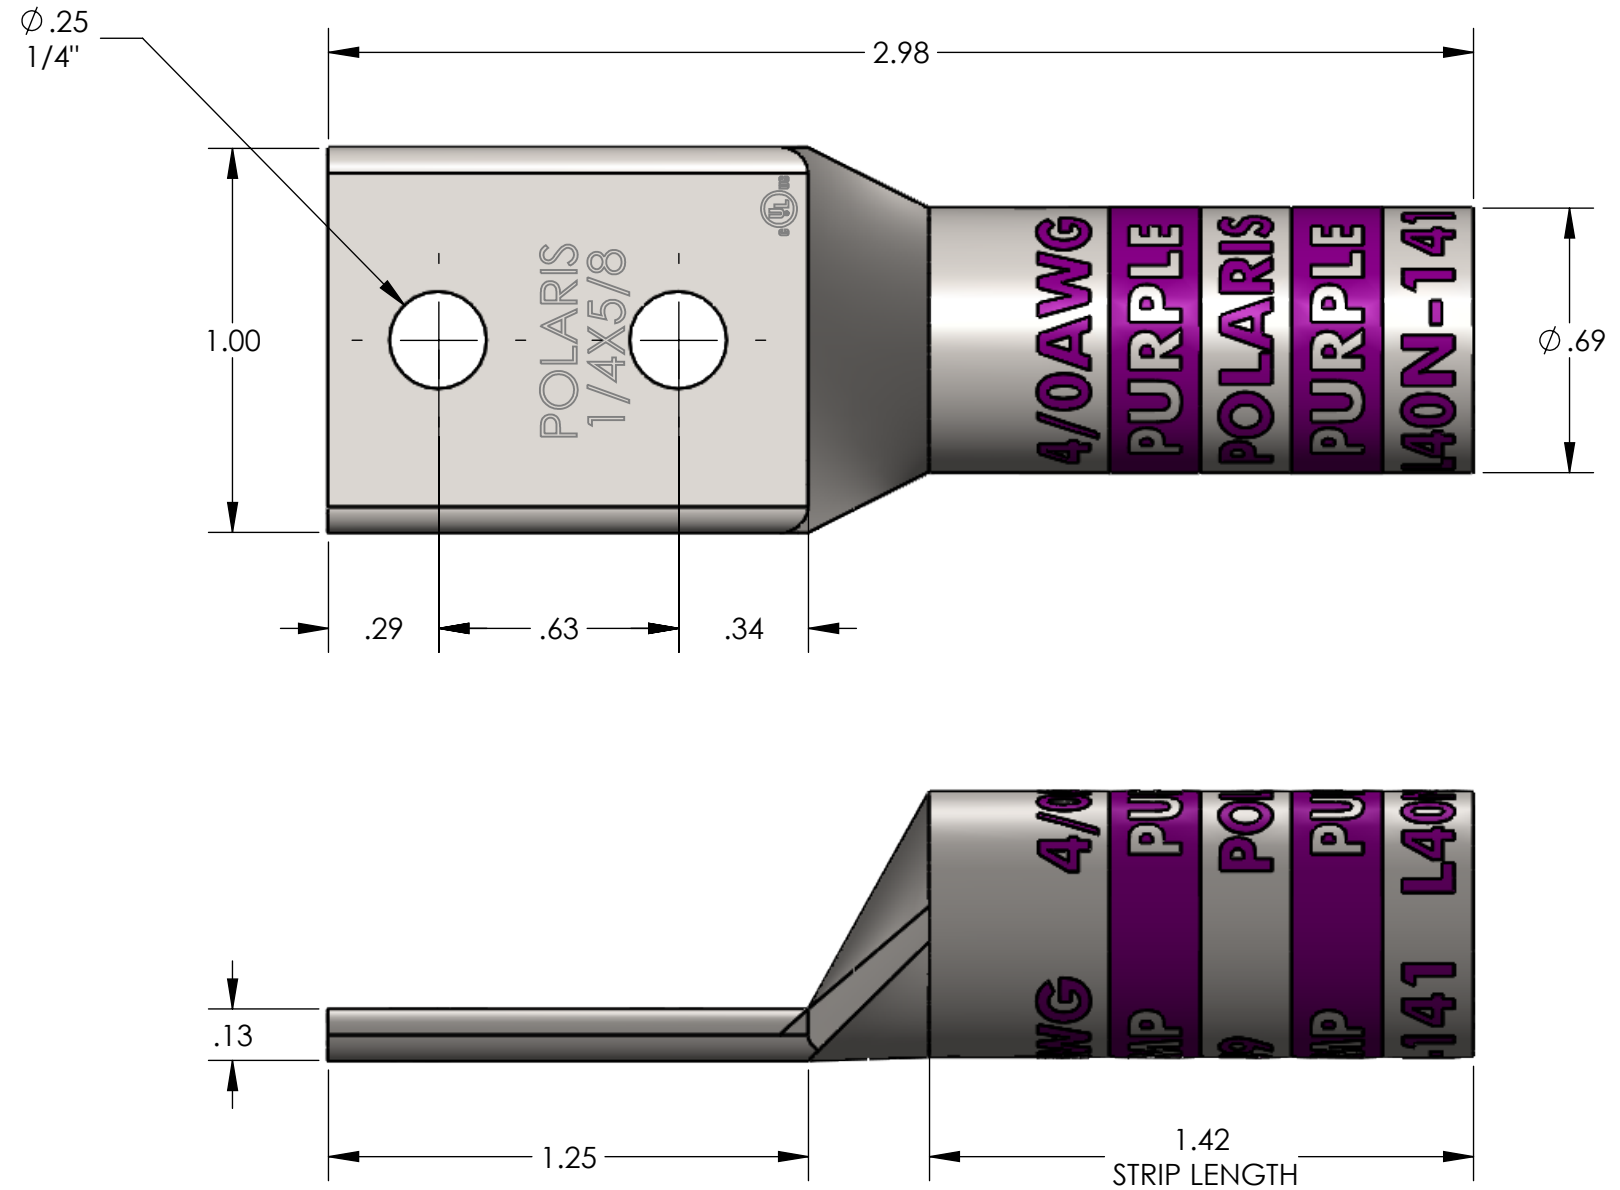

## COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART

LISTED TOOLS	N1240, NSI-12, P-750	HK1240	N12ID, M-250, M-500, RDC-1/0	ILC-12, ILC-12H, ILC-15	Y-35	TBM-15, TBM-14M	EP51OC			
WIRE RANGE	EXPANDED WIRE RANGE W/ N12ID TOOL	MIN. # OF CRIMPS REQUIRED	DIE COLOR	NSI DIE	NSI/GREENLEE DIE	NSI DIELESS	ILSCO DIE	BURNDY DIE	T&B DIE	HUSKIE DIE
4/0AWG	4/0AWG-#1AWG	2	PURPLE	CD12	KC12-4/0	DIELESS	ILD-10, ILD-54	U28RT	15511	HT41BC