


# EASY-STACK® CABLE STACKER



Easy-Stack® Cable Stacker is easy to load and can be installed quickly for a variety of applications, increasing productivity. Cables are self-securing and snap in place no matter what angle the fixture is mounted – even upside down. Designed to handle wires or cables up to 7/16” in diameter, it has the durability and strength to be installed and re-installed to accommodate change orders.

- A** Cables are self-securing – no snap to close.
- B** Strong enough to be installed and re-installed as needed.
- C** Can be installed with a nail, staple or screw (included) for application into wood or metal studs.

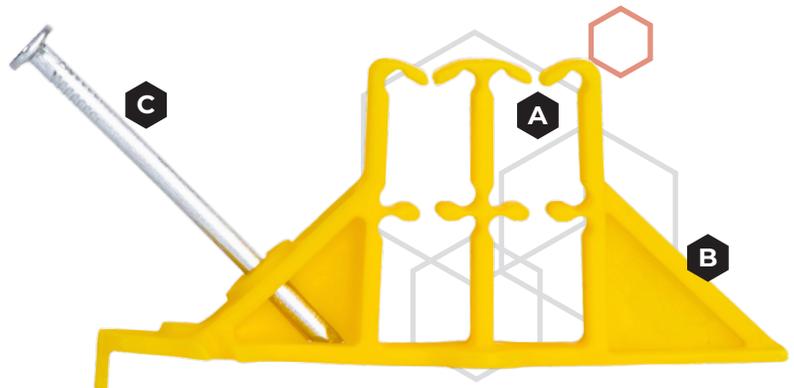

**c**   
**LISTED**  
STANDOFF  
E506111

  
300-4-(d)  
COMPLIANT

## INCREASE YOUR PRODUCTIVITY

Versatile and easy to use, Easy-Stack Cable Stacker is the perfect solution for a variety of applications. Install with a nail, staple or screw into wood or metal studs.





# EASY-STACK<sup>®</sup>

## CABLE STACKER

## INSTALLATION INSTRUCTIONS

Important Notice: Power should be off when working with electrical circuits. Before using this product the end user must evaluate it and determine if it is suitable for the intended application. End user assumes all risk and liability associated with such use.

- Position Easy-Stack at desired location
- Install Using
  - Hammer for nail
  - Staple with stapler
  - Self-tapping screw (included)
- Add cables

PART #	PRODUCT TYPE	PACK QTY	UPC
ES-YL-100	Pouch	100	662381014078
ES-YL-25	Pouch	25	662381014061

## WIRE CHART

UF or NM Cable - Flat		Coaxial / Data / etc	
QUANTITY	SIZE	QUANTITY	SIZE
1 - 10	14 - 2 AWG	1 - 4	RG - 59
1 - 10	12 - 2 AWG	1 - 4	RG - 8
1 - 8	10 - 2 AWG	1 - 4	RG - 6
1 - 10	14 - 3 AWG	1 - 10	CAT - 5, 5e
1 - 8	12 - 3 AWG	1 - 16	CAT - 6

When placing more than 5 14-2 AWG into Easy-Stack, deterioration of conductor ampacity and/or overheating should be considered. Product use should be in accordance with applicable electrical and building codes.

Warranty: Limited Remedy, Limited Liability: NSI Industries LLC warrants that each of its products will be free from material and manufacture defects at the date of shipment (unless specified otherwise). EXCEPT AS EXPRESSLY SET FORTH HEREIN, NSI INDUSTRIES MAKES OR GIVES NO OTHER WARRANTIES, EXPRESSED OR IMPLIED. Except where prohibited by law, NSI Industries LLC will not be liable for collateral, consequential, indirect or incidental damages arising out of, or connected in any way with the supply of products.

▲WARNING: Cancer and reproductive harm. [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

